



deco®

Decorative Metal
Wiring Accessories



Decorative Metal Wiring Accessories in Assorted Plate Finishes

Deco® unique product codes

When ordering any Deco® products, please specify the required finish by following the simple code structure as demonstrated here. For georgian style cast brass, please replace the 'Plate Style' and 'Product Finish' with GCBR eg. GCBR036BK.

VP	BN	036	BK
Plate Style	Product Finish	Product Number	Insert Colour

Contents

Switches	C5
Back Boxes	C9
Power Socket Outlets	C14
13A Fused Connection Units	C18
Control Switches	C20
Socket & Blank Plates	C25
Telephone & Data Sockets	C28
TV & Satellite	C29
New Media™ Plates	C30
Galvanised Boxes	C31
Dry Lining Boxes	C32

A comprehensive range of decorative metal wiring accessories now available under the single Deco® brand. A brand that is synonymous with high specification, high quality, long life and unprecedented value for money.

Each product is supplied individually packaged in its own distinctive printed box complete with comprehensive fitting instructions.

Deco® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our dedicated modules brochure can therefore be used in any combination on Deco® accessories.

Deco® plates are manufactured from stainless steel, georgian style (GCBR) plates are manufactured from cast brass. All Deco® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

Every Deco® product featured in the pages of this brochure are available in 9 distinctive quality finishes: antique brass*, polished brass, polished chrome, satin chrome*, satin brass*, black nickel, pearl nickel, stainless steel and georgian style cast brass.

*UK Design Registration 3015621.

All Deco® products are available with black or white inserts, excluding antique brass and black nickel finishes which are supplied with black insert and gasket only. A selection of Stainless Steel and Satin Chrome finishes are now available with grey inserts.






Switches

All Deco® switches are supplied complete with requisite switch module(s). However, should local conditions dictate, the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

A comprehensive range of available modules is illustrated in our dedicated Minigrid® brochure section.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.



All Deco® switch plates are modular as standard, allowing you to create virtually any switch plate you require e.g. Two way switch next to an intermediate switch (shown above).

Modular Ingot Plate Switches
Dimmer Switches | Toggle Switches

Switches



011 | 025



012



013



019



105



Switch modules interchangeable with MiniGrid® Modules.
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Plates Switches - MiniGrid®

- 011** 10AX 1 Gang 2 Way Plate Switch
- 012** 10AX 2 Gang 2 Way Plate Switch
- 013** 10AX 3 Gang 2 Way Plate Switch
- 019** 10AX 4 Gang 2 Way Plate Switch
- 105** 10AX 6 Gang 2 Way Plate Switch

Plates Switches - MiniGrid®

- 025** 10AX 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1

Back Box Depth: 011 012 013 025: 16mm Minimum 105 019: 25mm Minimum Cable Size: 4 x 1.5mm² or 2 x 2.5mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.





411 | 425




412



413



414

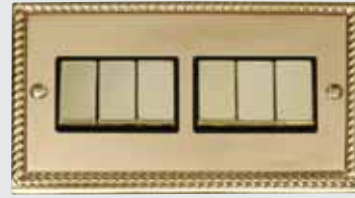

416

MINIGRID®

Switch modules interchangeable with MiniGrid® Modules.
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Ingot Plates Switches - MiniGrid®

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 413 10AX Ingot 3 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch
- 416 10AX Ingot 6 Gang 2 Way Plate Switch

Ingot Plates Switches - MiniGrid®

- 425 10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1

Back Box Depth: 411 412 413 425: 16mm Minimum 414 416: 25mm Minimum

Cable Size: 4 x 1.5mm² or 2 x 2.5mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



401



402



403



471



404



406



472



426



432

MINIGRID®

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Unfurnished Plates - MiniGrid®

- 401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- 402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- 403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- 404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- 406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- 426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
- 432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Please note 432 is not available in BN, BR, PN, SB or GCBR.
See range of MiniGrid® Modules in the MiniGrid® section

Standards: BS 5733

Back Box Depth: Dependent On Modules Fitted 471: 16mm Minimum 472: 25mm Minimum

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

471: 35mm (W) x 89mm (H) x 8mm (D) 472: 35mm (W) x 149mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Architrave Switch Plates (Unfurnished)

- 471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
- 472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures

These plates must be used with the dedicated architrave back boxes WA571/WA572 and can only be flush mounted.
See page C31.



512



518



MINIGRID®

The furnished plate shown here contains a selection of both single and twin width Minigrig® modules. GR100 yokes are required to mount the Minigrig® modules into prior to assembling the frontplate.

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A18).

MINIGRID®

2 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures

2 x GR100 Yokes required, see page C9

3 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures

3 x GR100 Yokes required, see page C9


Standards: BS 5733

Back Box Depth: 47mm

Dimensions: 512: 146mm (W) x 146mm (H) x 8mm (D) 518: 146mm (W) x 227mm (H) x 8mm (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 011 - Product No. Please note: Supplied with both black & white gaskets (AB & BN supplied with black gaskets only)
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

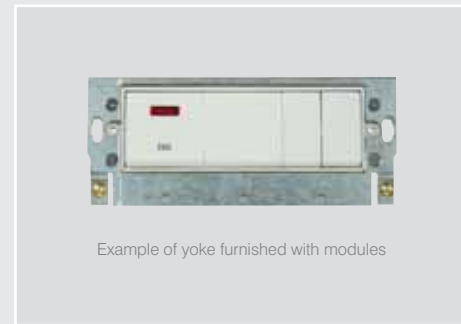

Example of yoke furnished with modules



GR100



WA512



WA518

MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large Minigrig® plates. Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes

GR100BK MiniGrid® Module Yoke - 6 Apertures - Black

GR100PW MiniGrid® Module Yoke - 6 Apertures - White

GR100GY MiniGrid® Module Yoke - 6 Apertures - Grey

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box

WA518 3 Tier 47mm Deep K.O. Box

Standards: 512 518: BS 4662

Dimensions: GR100: 129mm x 55mm x 14mm

512: 137mm x 137mm x 47mm

518: 137mm x 197mm x 47mm



140 | 161



152 | 162



153 | 163



154 | 164

MINIGRID®

Interchangeable modules available on page J37.

Dimmer Switches (Leading Edge)

- 140** 1 Gang 2 Way 400Va Dimmer Switch
- 152** 2 Gang 2 Way 400Va Dimmer Switch
- 153** 3 Gang 2 Way 400Va Dimmer Switch
- 154** 4 Gang 2 Way 400Va Dimmer Switch

We recommend the use of branded halogen lamps with all Deco® leading edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed to use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact Click® Technical support team.

Dimmer Switches (Trailing Edge)

- 161** 1 Gang 2 Way 100W Dimmer Switch
- 162** 2 Gang 2 Way 100W Dimmer Switch
- 163** 3 Gang 2 Way 100W Dimmer Switch
- 164** 4 Gang 2 Way 100W Dimmer Switch

We recommend the use of branded LED lamps with all Deco® trailing edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. For further information please contact Click® Technical support team.

Standards: BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 400Va: BS EN 61000-3-3 100W: BS EN 60669-2-1
Type: 400Va: Leading Edge Technology 100W: Trailing Edge
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 1.5mm²
Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. Please note: Supplied with both black & white gaskets (AB & BN supplied with black gaskets only)
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



140PL



152PL



153PL



185



186

Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022** 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042** 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)



Dimmer M10 Nut Runner

- SP900** Dimmer M10 Nut Runner Tool
- Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

Dimmer Mounting Unfurnished Plates

- 140PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL** 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL** 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185** 1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186** 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

The dimmer modules are supplied separately to the plates listed above.

Standards: BS 5733
Back Box Depth: Dependent On Modules Fitted
Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. Please note: Supplied with both black & white gaskets (AB & BN supplied with black gaskets only)
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



421



MD9125



422



423



424

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module. Not interchangeable with dimmers or other MiniGrid® modules.

Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

MD9125 Intermediate module available.

10AX Intermediate Toggle Switch Modules

- MD9125AB Intermediate Toggle Switch Module - Antique Brass
- MD9125BN Intermediate Toggle Switch Module - Black Nickel
- MD9125BR Intermediate Toggle Switch Module - Polished Brass
- MD9125CH Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN Intermediate Toggle Switch Module - Pearl Nickel

Standards: BS EN 60669-1

Back Box Depth: 25mm Minimum Cable Size: 4 x 1.5mm² or 2 x 2.5mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:

VP - Plate Style BN - Plate Finish 011 - Product No. Please note: Supplied with both black & white gaskets (AB & BN supplied with black gaskets only)

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 9 different Deco® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



- 13A Wall Socket Outlets | Round Pin
- Fused Connection Units | Wall Socket Outlets
- Fan Isolation Switches | DP Switches



771U



571U



780



580



770



570



786



586

Switched Sockets With USB Outlet

771U 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

770 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

Ingot Switched Sockets With USB Outlet

571U 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

570 13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth)

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1

Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Switched Sockets With Twin USB Outlets

780 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

786 13A 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Ingot Switched Sockets With Twin USB Outlets

580 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

586 13A Ingot 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1

Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²

Dimensions: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



535



035



038



039



1535



536



036



1536



1836

Switched Socket Outlets

- 035** 13A 1 Gang DP Switched Socket
- 036** 13A 2 Gang DP Switched Socket (Twin Earth)

Ingot Switched Socket Outlets

- 535** 13A Ingot 1 Gang DP Switched Socket
- 536** 13A Ingot 2 Gang DP Switched Socket (Twin Earth)

Standards: BS 1363-2
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Round Pin Socket Outlets

- 038** 5A Round Pin Socket
- 039** 2A Round Pin Socket

Ingot Switched Socket Outlets

- 1535** 13A Ingot 1 Gang DP 3 Pin Safety Shutter Switched Socket Outlet
- 1536** 13A Ingot 2 Gang DP 3 Pin Safety Shutter Switched Socket Outlet (Twin Earth)

Ingot Switched Safety Shutter Socket Outlets With Outboard Rockers

- 1836** 13A Ingot 2 Gang DP 3 Pin Safety Shutter Switched Socket Outlet (Twin Earth)

Standards: BS 1363-2 038 039: BS 546
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm² 038: 3 x 1.5mm² 039: 4 x 1.5mm² or 3 x 2.5mm²
Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



050



051



052



550



551



552



053



650



553



750



651



652



653



751



752



753

Fused Connection Units With Optional Flex Outlet

- 050 13A Fused Connection Unit
- 051 13A DP Switched Fused Connection Unit
- 052 13A DP Switched Fused Connection Unit With Neon
- 053 13A Fused Connection Unit With Neon

Fused Connection Units Without Flex Outlet

- 650 13A Fused Connection Unit
- 651 13A DP Switched Fused Connection Unit
- 652 13A DP Switched Fused Connection Unit With Neon
- 653 13A Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
 Back Box Depth: 25mm Minimum Cable Size: 3 x 2.5mm² or 2 x 4mm²
 Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Ingot Fused Connection Units With Optional Flex Outlet

- 550 13A Ingot Fused Connection Unit
- 551 13A Ingot DP Switched Fused Connection Unit
- 552 13A Ingot DP Switched Fused Connection Unit With Neon
- 553 13A Ingot Fused Connection Unit With Neon

Ingot Fused Connection Units Without Flex Outlet

- 750 13A Ingot Fused Connection Unit
- 751 13A Ingot DP Switched Fused Connection Unit
- 752 13A Ingot DP Switched Fused Connection Unit With Neon
- 753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1362
 Back Box Depth: 25mm Minimum Cable Size: 3 x 2.5mm² or 2 x 4mm²
 Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



022



023



522



523



623



722



622



020



520



723

3 Pole And 20A DP Switches Are Non-Modular.

20A Control Switches With Optional Flex Outlet

- 022 20A DP Switch
- 023 20A DP Switch With Neon

20A Control Switches Without Flex Outlet

- 622 20A DP Switch
- 623 20A DP Switch With Neon

3 Pole And 20A DP Switches Are Non-Modular

Fan Isolation Switch

- 020 10A 3 Pole Fan Isolation Switch
- This Product Is Not Modular

Standards: BS EN 60669-1

Back Box Depth: 25mm Minimum 020: 16mm Minimum Cable Size: 3 x 2.5mm² 020: 4 x 1.5mm² or 2 x 2.5mm²

Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Ingot 20A Control Switches With Optional Flex Outlet

- 522 20A Ingot DP Switch
- 523 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

- 722 20A Ingot DP Switch
- 723 20A Ingot DP Switch With Neon

Standards: BS EN 60669-1

Back Box Depth: 520: 16mm Minimum 522 523 722 723: 25mm Minimum

Cable Size: 520: 4 x 1.5mm² or 2 x 2.5mm² 522 523 722 723: 3 x 2.5mm²

Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



200



201



202



204



205



203



500



501



504



505



502



503

45A Switches And Socket Outlets

- 200 45A 1 Gang DP Switch
- 201 45A 1 Gang DP Switch With Neon
- 202 45A 2 Gang DP Switch
- 203 45A 2 Gang DP Switch With Neon
- 204 45A 2 Gang DP Switch With 13A DP Switched Socket
- 205 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 204 205: BS 4177

Back Box Depth: 35mm Minimum Cable Size: 1 x 16mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)
202 203: 88mm (W) x 146mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Ingot 45A Switches And Socket Outlets

- 500 45A Ingot 1 Gang DP Switch
- 501 45A Ingot 1 Gang DP Switch With Neon
- 502 45A Ingot 2 Gang DP Switch
- 503 45A Ingot 2 Gang DP Switch With Neon
- 504 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket
- 505 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Only available in selected finishes: CH, SC, AB, BN, PN & SS

Standards: 500 501 502 503: BS EN 60669-1 504 505: BS 4177

Back Box Depth: 35mm Minimum Cable Size: 1 x 16mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)
502 503: 88mm (W) x 146mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
AB Antique Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, PN Pearl Nickel.



660



655



675

Two keys provided (Spare keys available: SP660).

Lockable Switches

660 20A Double Pole Key Lockable Switch

Ingot Lockable Sockets

655 13A Ingot 1 Gang DP Key Lockable Socket With Neon

Lockable Sockets

675 13A 1 Gang DP Key Lockable Socket With Neon

Standards: 655 675: BS EN 60669-1 BS 1363-2 660: BS EN 60669-1
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



024



060



061



100

20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch With Neon

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket

Blank Plates

060 1 Gang Blank Plate
061 2 Gang Blank Plate

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: 024: BS EN 60669-1 100: BS EN IEC 61558-1 BS EN 61558-2-5
Back Box Depth: 024: 25mm Minimum 100: 47mm **Cable Size:** 024: 3 x 2.5mm² 100: 2 x 1.5mm² or 1 x 2.5mm²
Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)
 100: 88mm (W) x 146mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

TV, Telephone & Data.Sockets

The following pages contain details of Deco® products designed to deal with handling data and media transfer through telephone, computer, TV or radio. As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules section.



RJ11 Outlet | UK Telephone Outlets
Satellite Socket Outlets | Coaxial Sockets



115



120 | 125



121 | 126



156



157 | 170



065



066



158



159

RJ11 Telephone Outlets

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master

121 Twin Telephone Outlet - Master

125 Single Telephone Outlet - Secondary

126 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 16mm Minimum 115: 35mm Minimum
Termination Type: IDC 115: Screw
Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Satellite Outlets (Unshielded)

156 Non-isolated Single Satellite Outlet

157 Isolated Satellite & Isolated Coaxial Outlet

170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Non-isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet

066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet

159 Twin Isolated Coaxial Outlet

Back Box Depth: 16mm Minimum
Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



310



311



312

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.



MP603



MP606

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available. For the complete range of Semi-modular unfurnished plates see page K7.

Unfurnished Plates - New Media™

- 310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Half New Media Semi-Modular Part Furnished Plate 2 Tier Semi-Modular Unfurnished Plates


- MP603** Half New Media™ Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures
Available in Chrome (CH), Satin Chrome (SC) Satin Brass (SB) and Polar White (PW). Requires MP520 flush back box.
- MP606** Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures
Available in Chrome (CH), Satin Chrome (SC) and Polar White (PW). Requires MP525 or MP535 flush back box.

Standards: BS 5733 603 606; BS 1363-2
Back Box Depth: Dependent On Modules Fitted **Cable Size:** 603 606: 3 x 2.5mm² or 2 x 4mm²
Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)
 603: 250mm (W) x 86mm (H) x 8mm (D) 606: 250mm (W) x 216mm (H) x 8mm (D)


Understanding the code:
 VP - Plate Style **BN** - Plate Finish **011** - Product No.
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



WA093



SP650



SP675



WA094



WA095



WA571



WA572



WA370



WA375

essentials™

For the complete range of back boxes see Essentials™ page M4.

Galvanised Steel Back Boxes

- WA093** 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094** 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095** 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA370** 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)
- WA375** 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)
- WA571** 1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)
- WA572** 2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)
- WA096** 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097** 1 Gang 47mm Deep Galvanised Steel K.O. Box

Longer Fixing Screws

- SP650** Standard 3.5mm Dia. 50mm Long Screws (Bag 100)
- SP675** Standard 3.5mm Dia. 75mm Long Screws (Bag 100)
- SP625** Standard M3.5 Security Screw 25mm Long (Bag 100) Require 2mm security allen key/driver.

Understanding the code:
 Screws available in BR Brass, CH Chrome and BN Black Nickel finishes.
 Suffix code with preferred finish. Chrome finish may be used with white plate accessories




WA106P



WA107P



GA100



WA4135



WA4247

essentials™

For the complete range of back boxes see Essentials™ page M7.
For the complete range of longer fixing screws see Essentials™ page M6.

Dry Lining Boxes

- WA087P** 1 Gang 35mm Deep Dry Lining Box
- WA088P** 2 Gang 35mm Deep Dry Lining Box
- WA106P** 1 Gang 47mm Deep Dry Lining Box
- WA107P** 2 Gang 47mm Deep Dry Lining Box
- WA108P** Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

- WA4135** 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147** 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4235** 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4247** 2 Gang 47mm Deep FlameGuard® Dry Lining Box

Ezylink® Dry Lining Boxes

- GA100** 'Ezylink' Dry Lining Box Connector

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards.
Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.